

BENQ

Interactive Display Buatan Indonesia Kualitas Dunia

Made in Indonesia

Score TKDN + BMP:

RE6503N2 TKDN+BMP= 52,23%

RE7503N2 TKDN+BMP= 52,16%

RE8603N2 TKDN+BMP= 50,38%



Android 11



40 touch points



Gigabit Ethernet



IP5X Dustproof




OTA updates




TÜV certified


Pengaturan yang mudah

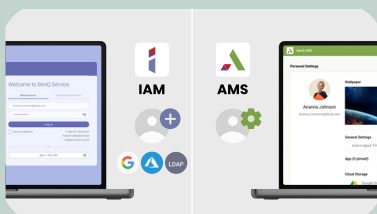

Pantau dan kelola display Anda secara terpusat

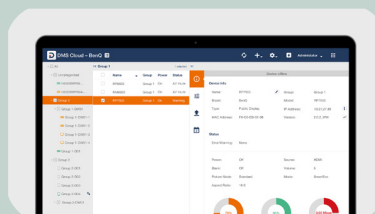

Mengontrol akses ke display dan akun

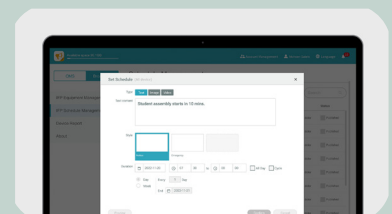

Melengkapi sistem PA sekolah Anda

Spesifikasi

DISPLAY

Diagonal Size	65", 75", 86"
Display Technology	IPS
Backlight	DLED
Aspect Ratio	16:9
Resolution	UHD 3840 × 2160 pixels
Brightness (typical)	450 nits
Contrast Ratio	1200:1
Dynamic Contrast Ratio	30000:1
LCD Viewing Angle	178°
Panel Refresh Rate	60 Hz
Response Time	8 ms
Panel Bit	10 bits
Panel Lifespan	50,000 hrs
Operating Hour	18 hours/7 days
Glass Hardness	9H tempered
Glass Type	3.2 mm
Germ-Resistant Technology	N/A
Panel Surface	Anti-Glare, Haze 25%
Display Orientation	Landscape

TOUCH

Touch Technology	Infrared touch
Accuracy	±1.0 mm (middle 90% touch area)
Touch Points	Up to 40
Touch Resolution	32767 x 32767
Object Recognition Range	≥2mm
Touch Response Time	≤10 ms
Compatibility	Windows XP/7/8/10/11 Linux Mac OS X Android Chrome

COMPUTING

Operating System	Android 11
CPU	Quad-Core (A55 x 4)
GPU	MaliTM-G52 2EE MC1
Memory	4GB
Storage	32GB

AUDIOVISUAL

Built-in Speaker	2 × 20 W (Max)
------------------	----------------

CONNECTIVITY

	Front	Rear	Top
HDMI In 2.0	x1	x2	
HDMI Out		x1	
Display port 1.2a		x1	
VGA In		x1	
USB-A 3.0(High speed data transfer & power supply)	x1	x2	
USB-A 2.0	x1		
USB-B 2.0 (Touch)	x1	x1	
USB Type-C 2.0 (5-in-1, 15W PD)	x1		
RS232		x1	
Earphone (3.5 mm)		x1	
PC AUDIO-IN (3.5 mm)		x1	
SPDIF (optical)		x1	
Power (AC) Inlet		x1	
OPS Slot		x1	
Wake up LAN/HDMI/VGA		Yes	
		x2	
LAN In/Out (RJ45)		OPS: 10/100/1000 Mbps Android: 10/100/1000 Mbps	

POWER

Power SupplyAccuracy	AC 100-240V 50/60Hz
Power consumption (typical)	65" : 95.3 W 75" : 114.5 W 86" : 139.3 W

SOFTWARE/SOLUTIONS

Device Management Solution	DMS 3.0
Account Management Solution	AMS
Broadcasting Solution	X-Sign Broadcast
Wireless Casting Solution	InstaShare 2
Whiteboarding Solution	EZWrite 6.0
Floating Tool	Yes
Class Recording	Yes
Scalable canvas	Yes
Handwriting recognition	Yes
Co-annotation via intranet	Yes
Co-annotation via internet (Web browser)	Yes

ACCESSORIES

Remote Control, Stylus x 2, Quick Start Guide, 1 × VGA (3m), 1 × HDMI (3m), 1 × USB-B for touch (3m), 1 × USB-C (1.5m), Wall Mount

MODEL

	RE6503N2	RE7503N2	RE8603N2
Dimension (WxHxD) (Without Packing/With Packing)	1482.1 x 87.7 x 891.4 mm / 1640.0 x 185.0 x 1010.0 mm	1716.5 x 87.7 x 1025.8 mm / 1860.0 x 185.0 x 1125.0 mm	1961.8 x 87.7 x 1163.9 mm / 2095.0 x 185.0 x 1265.0 mm
Net Weight/Gross Weight	36.1 KG/49.5 KG	49.0 KG/64.9 KG	63.4 KG/81.3 KG